

Measurement example



Functions

Adjustable measuring force mechanism, Origin point setting, Zero setting, Hold, Function Lock, Auto power off, Measurement data output, Error display

Optional Accessories


Code No.	Type	Description
264-020	—	USB Input Tool Series USB Keyboard Signal Conversion Type IT-020U
05CZA662	B	Connection cable (1 m)
05CZA663	B	Connection cable (2 m)
06AFM380B	B	USB Input Tool Direct (2 m)
02AZD730G	IP67	U-WAVE-T
02AZD880G	Buzzer	U-WAVE-T
02AZE200	—	U-WAVE-T mounting bracket
02AZD790B	B	Connection cable for U-WAVE-T (160 mm)
02AZE140B	B	Connection cable for U-WAVE-T For foot switch

Adjustable Measuring Force



To preset the measuring force, adjust the measuring force setting scale on the thimble with the screwdriver supplied.

Constant-Measuring-Force Mechanism

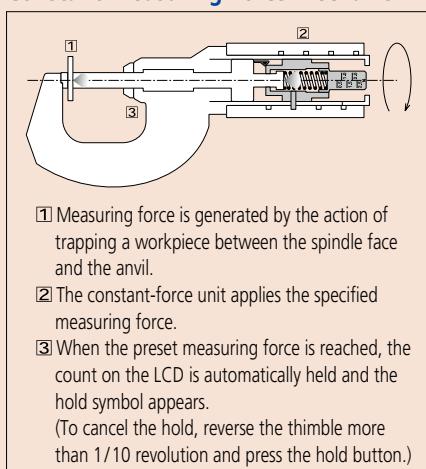

ABSOLUTE Digimatic Micrometers SERIES 227 — with Adjustable Measuring Force

- Digimatic micrometer equipped with a constant/low measuring force mechanism. The measurement-value hold function automatically retains the data at a specified measuring force. (Pressing with a larger force than the specified measuring force does not affect the measurement result.)
- It is suitable for measuring flexible workpieces such as electric wire, paper, and rubber.
- Non-rotating spindle reduces workpiece deformation.
- Measuring faces: Carbide tipped



227-201-20

SPECIFICATIONS

Metric

Code No.	Range (mm)	Resolution (mm)	Measuring force (N)	Maximum permissible error J_{MPE} (μ m)	Flatness (μ m)	Parallelism (μ m)	Measuring force (N)	Accuracy of the selected measuring force* (N)	Repeatability of measuring force* (N)	Mass (g)
With SPC data output										
227-201-20	0 - 15		0.5 - 2.5 (adjustable)				0.5, 1.0, 1.5, 2.0, 2.5	$\pm (0.1 + \text{the selected measuring force}/10)$	within 0.1	300
227-203-20	15 - 30	0.001		± 2	0.3	2	2, 4, 6, 8, 10	$\pm (0.4 + \text{the selected measuring force}/10)$	within 0.4	380
227-205-20	0 - 10		2 - 10 (adjustable)							345
227-206-20	10 - 20									425
227-207-20	20 - 30									415

Inch/Metric

Code No.	Range (in)	Resolution	Measuring force (N)	Maximum permissible error J_{MPE} (in)	Flatness (in)	Parallelism (in)	Measuring force (N)	Accuracy of the selected measuring force* (N)	Repeatability of measuring force* (N)	Mass (g)
With SPC data output										
227-211-20	0 - 0.6		0.5 - 2.5 (adjustable)				0.5, 1.0, 1.5, 2.0, 2.5	$\pm (0.1 + \text{the selected measuring force}/10)$	within 0.1	300
227-213-20	0.6 - 1.2	0.00005 in / 0.001 mm		± 0.0001	0.000012	0.00008	2, 4, 6, 8, 10	$\pm (0.4 + \text{the selected measuring force}/10)$	within 0.4	380
227-215-20	0 - 0.4		2 - 10 (adjustable)							345
227-216-20	0.4 - 0.8									425
227-217-20	0.8 - 1.2									415

- Measurement posture: horizontal orientation only (Recommended spindle inclination: within $\pm 3^\circ$)
- Power source: SR44 battery (1 pc.), **938882** included as standard (for operational checks)
- Battery life: Approx. 5 years under normal use
- Position detection method: Electrostatic capacity absolute sensor
- Standard accessories: Setting standard, 1 pc. (except for measuring range 0 to 15 mm (0 to 0.6 in)/0 to 10 mm (0 to 0.4 in) models), Screwdriver (**210183**), 1 pc.

* These values are guaranteed when micrometer is used in a horizontal orientation (within ± 3 degrees)

DIMENSIONS

